

### TO-92 Plastic-Encapsulate Transistors

#### FEATURES


High total power dissipation.( $P_c=0.45W$ )

High  $h_{FE}$  and good linearity

Complementary to S9015

#### MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V <sub>CB0</sub>	Collector-Base Voltage	50	V
V <sub>CE0</sub>	Collector-Emitter Voltage	45	V
V <sub>EB0</sub>	Emitter-Base Voltage	5	V
I <sub>c</sub>	Collector Current -Continuous	0.1	A
P <sub>c</sub>	Collector Power Dissipation	0.45	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55-150	°C

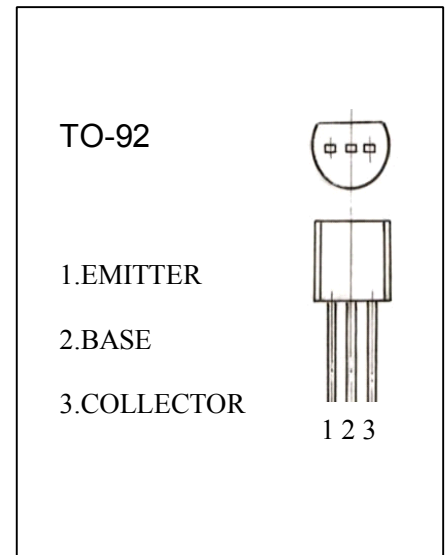

#### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>c</sub> =100μA, I <sub>E</sub> =0	50			V
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>c</sub> = 1mA, I <sub>B</sub> =0	45			V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> =100μA, I <sub>c</sub> =0	5			V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =50V, I <sub>E</sub> =0			0.1	μA
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> =35V, I <sub>B</sub> =0			0.1	μA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>c</sub> =0			0.1	μA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> =5V, I <sub>c</sub> = 1mA	60		1000	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =100mA, I <sub>B</sub> = 5mA			0.3	V
Base-emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>c</sub> =100mA, I <sub>B</sub> = 5mA			1	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =5V, I <sub>c</sub> = 10mA f=30MHz	150			MHz

#### CLASSIFICATION OF h<sub>FE</sub>(1)


Rank	A	B	C	D
Range	60-150	100-300	200-600	400-1000

# Typical Characteristics


# S9014

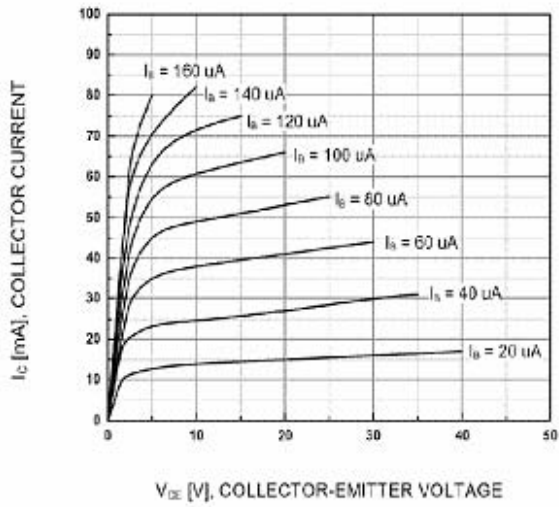


Static Characteristic

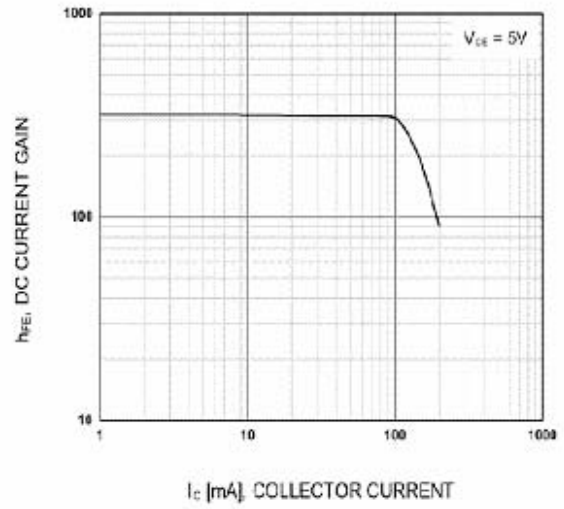

DC current Gain

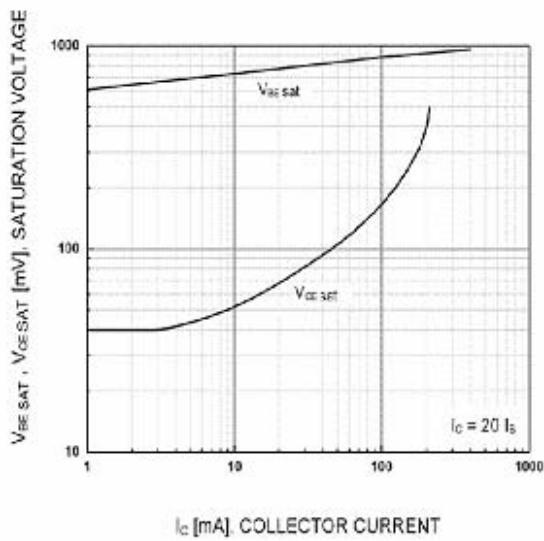

Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

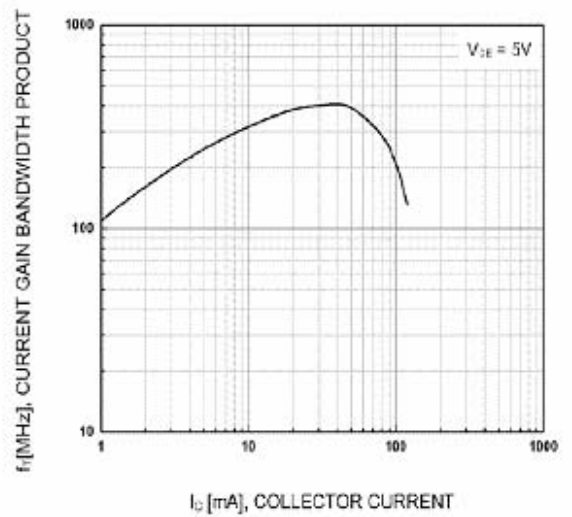

Current Gain Bandwidth Product